

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2007 (15.03.2007)

PCT

(10) International Publication Number
WO 2007/029901 A1

(51) International Patent Classification:
B67D 3/04 (2006.01)

(21) International Application Number:
PCT/KR2005/004052

(22) International Filing Date:
30 November 2005 (30.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20-2005-0025542 5 September 2005 (05.09.2005) KR
10-2005-0082101 5 September 2005 (05.09.2005) KR

(71) Applicant (for all designated States except US):
BARFLEX CORPORATION [KR/KR]; 140-1, Won-
chon-dong, Yuseong-gu, Daejeon 305-712 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JEONG, Jin-Do**

[KR/KR]; Lucky Doma A.P.T. 5-505, Doma-dong,
Seo-gu, Daejeon 302-140 (KR).


(74) Agents: **LEE, Chae-Hyung** et al.; 5-623, Hyochang-dong,
Yongsan-gu, Seoul 140-896 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY,
MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,
SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: **LIQUID DISPENSING APPARATUS CAPABLE OF REGULATING DISCHARGED AMOUNT OF LIQUID**

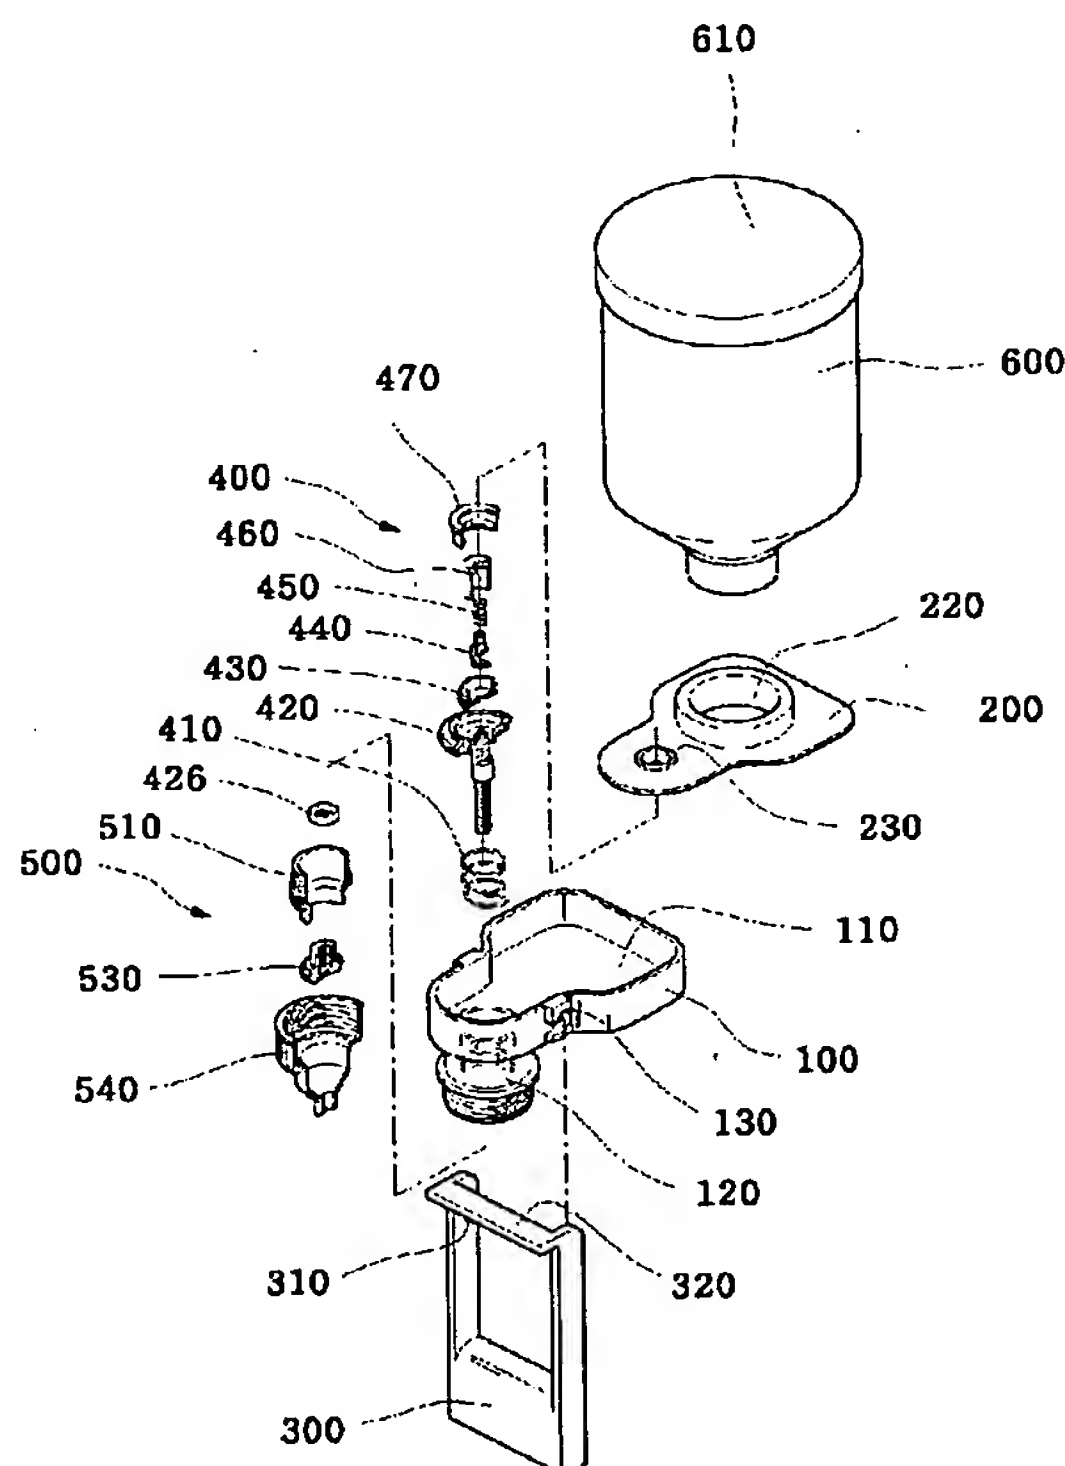

(57) Abstract: Disclosed is a liquid dispensing apparatus ca-
pable of regulating a discharged amount of liquid. The ap-
paratus comprises a main body having a liquid storing part
formed therein and a protrusion part communicated with the
liquid storing part at a side of the main body, downwardly pro-
truded and having a threaded part formed therein, a support
member having a liquid supply aperture formed thereto be-
ing provided to an inside of the protrusion part; a liquid dis-
charge-operating member supported to be vertically movable
on the support member provided to the protrusion part of the
main body and controlling a liquid inflow into the protrusion
member; a cover fixed on an upper part of the main body to
which the liquid discharge-operating member is supported and
having a hole through which a part of the liquid discharge-op-
erating member is protruded and an opening into which a liq-
uid supply receptacle is inserted and fixed; a liquid discharg-
ing member thread-engaged to be relatively movable to the
threaded part of the protrusion part, capable of changing an in-
ner space formed with the protrusion part and vertically moved
as the liquid discharge-operating member is vertically moved,
thereby discharging the liquid to an exterior; and a lever ro-
tatably mounted to the main body and pressing the liquid dis-
charge-operating member protruded through the hole of the
cover to move the liquid discharge-operating member.

WO 2007/029901 A1



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.